



# CJP13系列 series




应用领域：高端醫療器械（監護儀、分析儀）、保健器材、家用電器、廚房衛浴、美容美體等。  
 Application: High-end medical equipment, Health care equipment, Household appliance, Kitchen and bathroom, Cosmetology and bodycare etc..



產品參數表 Parameters									
型號 Model	額定電壓 Rated voltage	充氣時間 (500CC 0~300mmHg) Inflation time	負載流量 (300mmHg) Flow under load	負載電流 (0~300mmHg) Current under load	最大壓力 Max pressure	氣密性 Leakage	再啓動電壓 Restart	噪音 Noise voltage	
CJP13-F03A1	DC 3 V	< 17 S	≥ 0.4 L/min	≤ 650 mA	≥ 400 mmHg	< 3 mmHg/min	< 2.5 V	< 60 dB	
CJP13-F04A1	DC 3.7V	< 15 S	> 0.5 L/min	≤ 600 mA	≥ 400 mmHg	< 3 mmHg/min	< 3.3 V	< 60 dB	
CJP13-F05A1	DC 5V	< 17 S	> 0.5 L/min	≤ 400 mA	≥ 400 mmHg	< 3 mmHg/min	< 4.5 V	< 60 dB	
CJP13-F06A1	DC 6 V	< 14 S	> 0.4 L/min	≤ 350 mA	≥ 400 mmHg	< 3 mmHg/min	/	< 60 dB	
CJP13-F04B2	DC 4.2V	< 15 S	/	≤ 600 mA	≥ 400 mmHg	< 3 mmHg/min	< 3.8 V	< 55 dB	
其它參數 Others									
壽命實驗 Life test			30,000次 (500CC氣罐，充氣12秒停2秒排氣3秒為一循環)						
使用環境 Working environment			0~50°C, 75%RH						
可根據客戶具體要求進行定制。Customization based on specific customer requirements available.									

產品特性圖  
Performance Curve

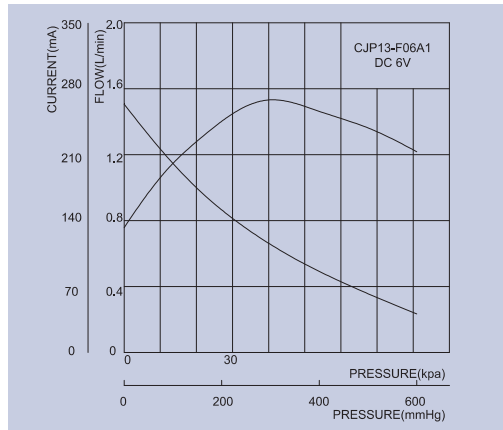

產品構造圖  
Dimension Drawing

