



CJP37C系列 series




应用领域：高端醫療器械(監護儀、分析儀)、保健器材、家用電器(飲料機...)、廚房衛浴、美容美體等
 Application: High-end medical equipment, Health care equipment, Household appliance, Kitchen and bathroom, Cosmetology and bodycare etc.



產品參數表 Parameters							
型號 Model	額定電壓 Rated voltage	充氣時間 (500CC 0~300mmHg) Inflation time	負載電流 (300mmHg) Current under load	最大壓力 Max pressure	氣密性 Leakage	再啓動電壓 Restart voltage	噪音 Noise
CJP37-C03A1	DC 3.0V	≤ 14 S	≤ 700 mA	> 400 mmHg	< 3 mmHg/min	< 2.2 V	< 60 dB
CJP37-C04B1	DC 4.0V	≤ 9 S	≤ 750 mA	> 400 mmHg	< 3 mmHg/min	< 3.0 V	< 60 dB
CJP37-C06B1	DC 6.0V	≤ 9 S	≤ 400 mA	> 400 mmHg	< 3 mmHg/min	< 3.2 V	< 52 dB
CJP37-C12B1	DC 12.0V	< 13 S	≤ 200 mA	≥ 450 mmHg	< 3 mmHg/min	< 6.0 V	< 49 dB
CJP37-C12D2	DC 12.0V	≤ 10 S	≤ 300 mA	> 540 mmHg	< 3 mmHg/min	< 6.0 V	< 55 dB
其它參數 Others							
壽命實驗 Life test			30,000次 (500CC容器, 充氣10S停2S排氣3S為一個循環)				
使用環境 Working environment			0~50°C, 75%RH				
可根據客戶具體要求進行定制。Customization based on specific customer requirements available.							

產品特性圖 Performance Curve

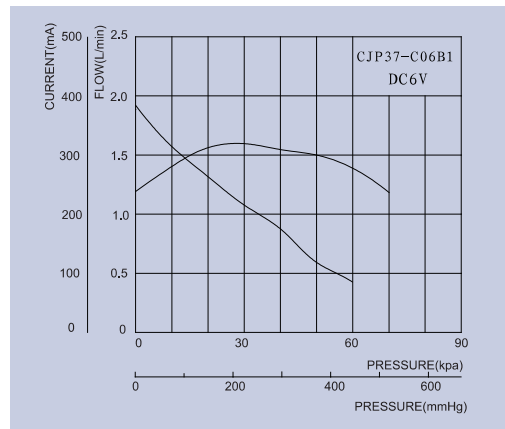

產品構造圖 Dimension Drawing

